



PS8401 Jitter Cleaning 3.0Gbps HDMI™ Repeater

Product Brief

PS8401

KEY FEATURES

- Clock and Data Jitter Cleaning – 12dB Jitter Attenuation performance for out-of-band HDMI clock jitter
- CrystalFree technology – no external crystal or reference clock is needed
- Compliant to HDMI 1.4b specification up to 3.0Gbps (300MHz TMDS Clock)
- Supports 4K x 2K and 1080p Stereo 3D HDMI formats which require 2.97Gbps (297MHz TMDS clock) operation
- AC input coupling capable for level shifting applications
- DC input coupling capable for repeater applications
- Programmable receiver equalization
- Programmable TMDS output pre-emphasis and EMI reduction
- Automatic inter-pair and intra-pair de-skewing
- Automatic power down management
- Automatic output squelch circuit for fail-safe operation and power management
- Flexible pin and I2C control mode options
- Requires 3.3V and 1.5V power supplies
- 5x5mm 40-pin TQFN package
- 0° to 70°C operating temperature range
- ESD: HBM 8 kV

GENERAL DESCRIPTION


The PS8401 integrates a jitter tolerant TMDS receiver and a jitter cleaning TMDS transmitter for HDMI repeater applications. It removes both the data and clock jitter and the timing skews from the TMDS input to deliver a compliant and very low jitter HDMI output.

The PS8401 is ideal for Source, Sink and repeater device applications where jitter attenuation is needed. Such requirement might exist in a Source to remove Tx jitter and/or induced media (transmission path) jitter in order to meet HDMI output jitter requirements, especially at higher TMDS clock rates. It can also be used within a switch or Sink as a repeater function to improve signal integrity. Signal integrity can be further optimized through the use of the PS8401's programmable input equalization and output pre-emphasis controls.

The PS8401 can accept either an AC or DC coupled input signal.

APPLICATIONS

- PC mother board or graphics card
- Dual-mode DisplayPort to HDMI/DVI Cable Adapters
- Cable extension with active repeater
- DVD Players or Set-top boxes
- Game console
- AV receivers

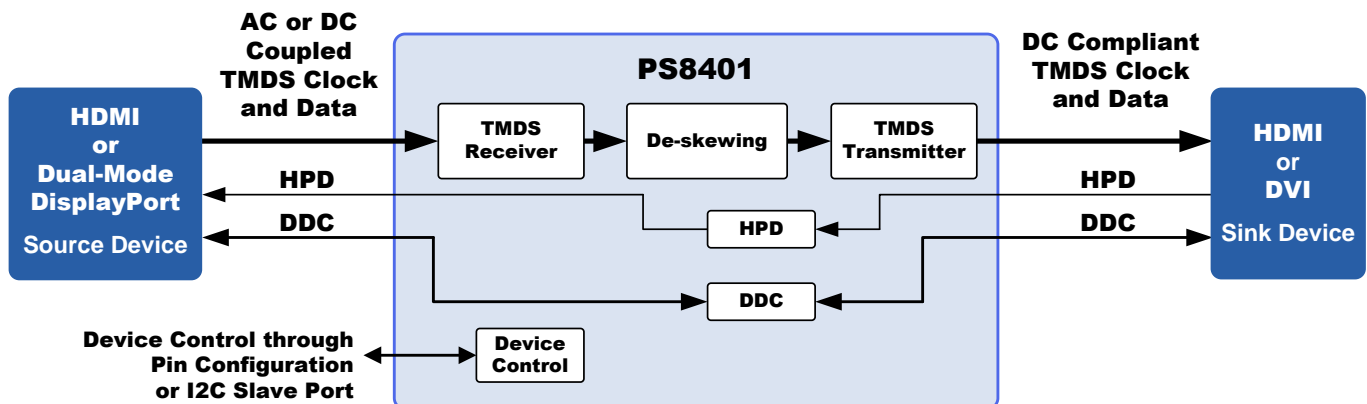

Information furnished by Parade Technologies is believed to be accurate and reliable. However, no responsibility is assumed by Parade Technologies for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specification is subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Parade Technologies. Trademarks and registered trademarks are the property of their respective owners.

Parade Technologies, Inc.
TEL: 408-329-5540 FAX: 408-329-5541
<http://www.paradetech.com>

© 2012 Parade Technologies, Inc.
All rights reserved.

Rev. 2 July 2012